

# ZL200ZK-LIMO

## SPECIFICATION



ENGINE	
ENGINE TYPE	SINGLE CYLINDER, WATER COOLING, 4-STROKE
DISPLACEMENT	197.0 ML
COMPRESSION RATIO	10.5:1
MAX POWER OUTPUT	10.3 / 7500 KW/R/MIN
MAX TORQUE	14.2 / 6000 N-M/R/MIN
CLUTCH	
WET, MULTI-PLATE, PRESSURE SPLASH	
TRANSMISSION & REVERSE	
5 FORWARD GEARS + 1 REVERSE	
STEERING MECHANISM	
STEERING HANDLE BAR	
CHASSIS	
FR / RR 50×100 RECTANGULAR STEEL TUBE	
FRONT SUSPENSION	
TYPE 800 W270 SOLO FRONT SHOCK ABSORBER WITH INTERCHANGEABLE WHEEL	
REAR SUSPENSION	
INTERGRATED OUTER MOUNTING 7 PCS LEAF SPRING, CHAN'AN REAR AXLE	
BRAKING SYSTEM	
FR 130, RR 180, FR MECHANICAL / RR HYDRAULIC BRAKING	
WHEEL TIRE	
FR / RR 4.50-12	
BATTERY	
12V / 9AH	
STARTING METHOD	
ELECTRIC / KICK STARTER	
FUEL TANK	
GASOLINE, 12L	
FUEL CONSUMPTION	
≤354	
GROUND CLEARANCE	
160MM	
MAX SPEED	
55 KM/H	
OVERALL DIMENSION	
WHEEL BASE	FR 1740MM / RR 2730MM
DIMENSION	5830×1400×2030MM
SEATS CAPACITY	18~20 PASSENGERS
VEHICLE WEIGHT	
KERB 550KGS, PAY 580KGS	
Q'TY LOADED IN CONTAINER	
12 SETS IN CKD / 20GP; 25 SETS IN CKD / 40HQ	





LEFT-SIDE FRONT VIEW




RIGHT-SIDE FRONT VIEW



RIGHT SIDE VIEW




FR SHOCK ABSORBER

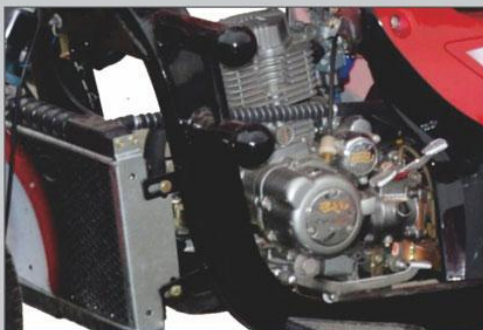

WATER-COOLING ENGINE



DRIVER TOP COVER

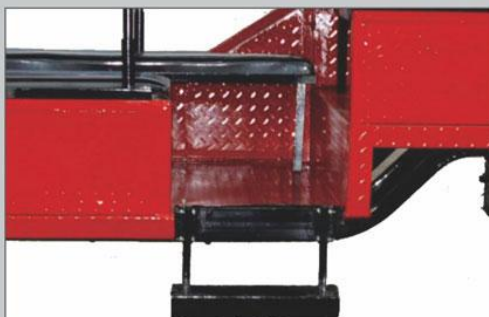

PASSENGER FOOT STEP



VENTILATION WINDOW



SPACIOUS PASSENGER DECK